

## SCM Creator (+Github) - Feature #2078

### Show users a friendly URL instead of the repo's full path

29 Jun 2012 03:01 - Humberto Anjos

<b>Status:</b>	Closed	<b>Start date:</b>	29 Jun 2012
<b>Priority:</b>	Normal	<b>Due date:</b>	
<b>Assignee:</b>	Andriy Lesyuk	<b>% Done:</b>	100%
<b>Category:</b>		<b>Estimated time:</b>	0.00 hour
<b>Target version:</b>			
<b>External issue:</b>			
<b>Description</b>			
It's the same situation as <a href="#">#2075</a> (Redmine-as-SourceForge), but another issue: since users cannot access the server's filesystem, the server must provide URLs for external access. They will exist, but the Repository tab shows the repo's full path instead, and the URLs users can actually use have to be shown elsewhere.			
The way I see it, given <a href="#">#2075</a> , since nobody but the Redmine admins can access the filesystem, nobody but the Redmine admins should be able to see the paths in the first place. So, in the vein of the <a href="#">Redmine Checkout plugin</a> , I propose an extra functionality where Redmine admins may provide a mapping from the repo's path (what Redmine actually stores and uses) to its corresponding public URL (which is what users and project managers can see and use).			
<b>Related issues:</b>			
Related to SCM Creator (+Github) - Feature #2075: Make an option to fully aut...			<b>Open</b> <b>26 Jun 2012</b>

#### Associated revisions

##### Revision 128 - 14 Sep 2013 22:23 - Andriy Lesyuk

Showing external URL under Repositories tab (#2078), replaced [] with more safe gsub! and more

#### History

##### #1 - 29 Jun 2012 03:04 - Humberto Anjos

The External Issue I put makes no sense (I thought it linked to this Redmine ); can you please clear it?

##### #2 - 29 Jun 2012 09:12 - Andriy Lesyuk

- Status changed from New to Incomplete
- Assignee set to Andriy Lesyuk
- External issue deleted (#2075)

I did not get the issue...

Can you show by examples? What external URL is shown and what it should be?

##### #3 - 29 Jun 2012 11:09 - Humberto Anjos

Andriy Lesyuk wrote:

I did not get the issue...

Can you show by examples? What external URL is shown and what it should be?

The URLs the Repository tab shows are the ones Redmine stores and uses: say, file:///var/lib/svn/project.repo\_id. But users can't get to the server's filesystem, so they need externally accessible URLs, like http://redmine.host/svn/project.repo\_id. It's easy to configure Apache to make the HTTP URLs, but there's no way to configure Repository tab to show users the HTTP URL instead of the file:// URL, which is useless to the user.

Also, on the heels of [#2075](#), the actual file:// URLs should only be seen by the Redmine admins, for whom this information is relevant. All the other users

have no need to know where in the server the repos actually are. So, when project managers are creating a new repository, they should see something like `http://redmine.host/svn/project.repo_id` the whole time, even though what Redmine actually stores is `file:///var/lib/svn/project.repo_id`.

Does all this make sense? I can expand more once I get to work

#### #4 - 29 Jun 2012 12:09 - Andriy Lesyuk

Where is `file:///var/lib/svn/project.repo_id` shown for users? Please give me screenshot.

#### #5 - 29 Jun 2012 13:43 - Humberto Anjos


- File `file-URL-being-shown.PNG` added

Andriy Lesyuk wrote:

I may have expressed myself poorly (again). I'll start posting these at work where I can actually see the Redmine instance...

Where is `file:///var/lib/svn/project.repo_id` shown for users? Please give me screenshot.

The `file://` URL is visible at the project's Settings tab, subtab Repositories, column Repository, accessible at `http://<redmine-host>/projects/<project>/settings?tab=repositories`, as in the screenshot below:

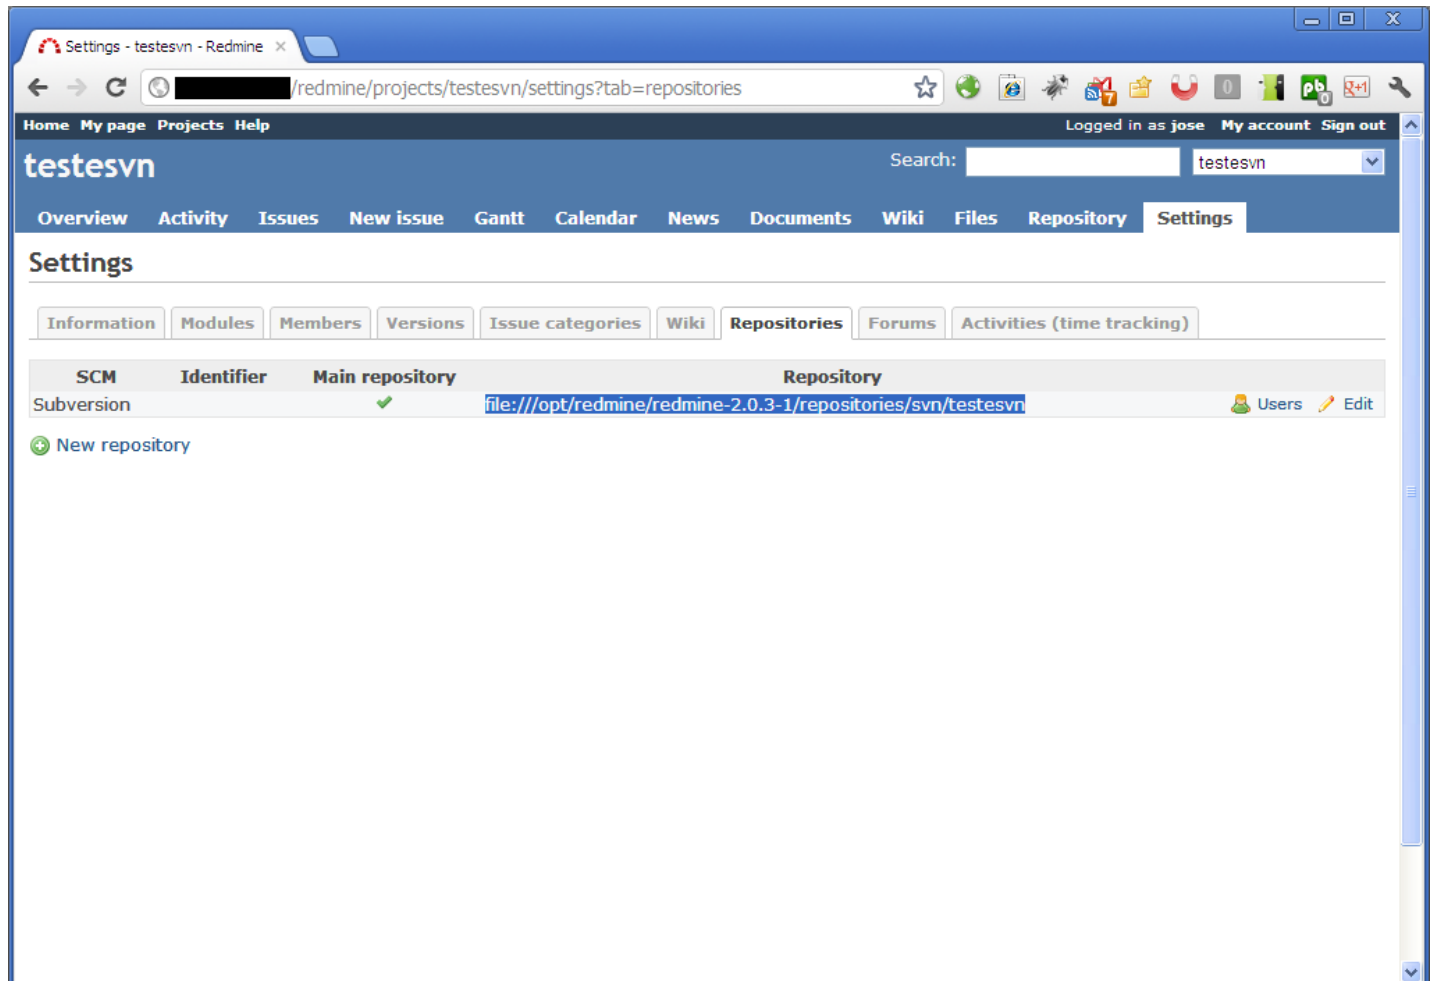

In my situation any user can create projects, and so they will encounter `file://` URLs sooner or later.

**#6 - 29 Jun 2012 15:01 - Andriy Lesyuk**

- Status changed from *Incomplete* to *Open*

Oh, I see now... Thanks!

**#7 - 08 Oct 2012 14:27 - Andriy Lesyuk**

I think this can be done only using some option... Because, in this case, you actually want to replace the real information with the fake. Maybe be :fake\_url option...

**#8 - 09 Oct 2012 12:39 - Humberto Anjos**

I was thinking strictly of a [Redmine Checkout](#) -like solution: a **Regular expression** field to parse and capture the real information, and a **Replacement text** field for the generated URL.

**#9 - 25 May 2013 20:27 - Alatar AI**

Can you explain why you use local path for redmine pero setting? As I understand, you need local path only on repo create stage but after creation redmine can work with this repo over common interface (svn: or http:).

**#10 - 14 Sep 2013 21:04 - Andriy Lesyuk**

Alatar AI wrote:

Can you explain why you use local path for redmine pero setting? As I understand, you need local path only on repo create stage but after creation redmine can work with this repo over common interface (svn: or http:).

I guess, this question was to me (please use Forums in such cases)... The same way SVN can access a repo using file:// and file:// is much faster as it does not involve client-server.

**#11 - 14 Sep 2013 22:24 - Andriy Lesyuk**

- Status changed from *Open* to *In Progress*

- % Done changed from 0 to 20

**#12 - 19 Sep 2013 10:16 - Andriy Lesyuk**

Please check [0.4.3](#) and tell, if that's what you wanted.

**#13 - 29 Apr 2014 07:53 - Alatar AI**

Please check 0.4.3 and tell, if that's what you wanted.

Yes that's it, thanks!

PS: Sorry for late answer.

**#14 - 19 Dec 2016 21:52 - Andriy Lesyuk**

- Status changed from *In Progress* to *Closed*

- % Done changed from 20 to 100

Ok. Assuming, that this issue was fixed in [0.4.3](#). Please reopen or create new issue, if you think, that it was not.

**Files**

---

file-URL-being-shown.PNG	53.6 KB	29 Jun 2012	Humberto Anjos
--------------------------	---------	-------------	----------------